



Manufacturers and distributors of sealing
and Jointing Materials

DATA / SPECIFICATION SHEET

NOVUS FI (Foil)

DESCRIPTION

Novus FI is a graphite laminate material with one or more thin, flat stainless steel 316 insertions. The thickness of the reinforcement is 0.05mm. The graphite sheet is fixed to the insertion by means of a super thin chloride-free adhesive layer. This reinforcement results in a sturdy gasket which is relatively easy to handle and simple to process into gaskets.


SERVICE

Novus FI is used in a wide range of applications in the chemical and petrochemical and manufacturing industries including pumps, compressors and pipe joints. It is commonly used as a back up sheet for Novus TI due to the ease of manual cutting.

AVAILABILITY


Thickness range = 1.0mm to 3.0mm
Standard sheet size = 1.0m x 1.0m

Other thicknesses available on request.

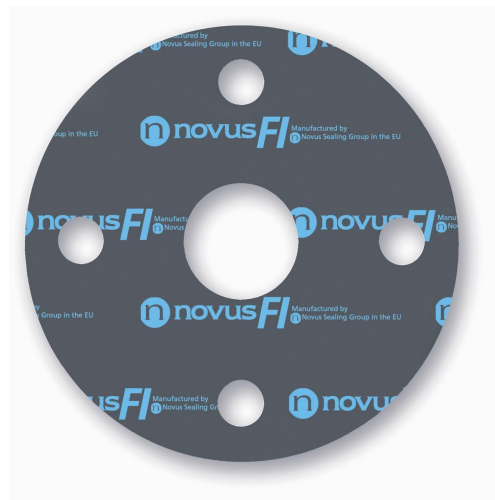

TYPICAL PHYSICAL PROPERTIES

Thickness		1.5mm
No. of Inserts		1
Density		1.0g/cm ³
Ash Content		Max 2%
Chloride Content		Max 50 ppm
Compressibility	ASTM F36A	40-50%
Recovery	ASTM F36A	10-15%
Residual Stress	DIN 52913(300°C)	Min 45 MPa
ASME m Factor y Value		2 1500psi

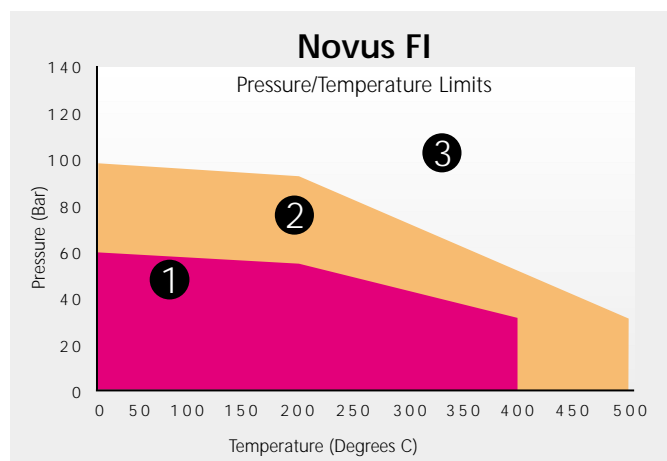

- ① Suitable subject to chemical compatibility
- ② Suitable in some cases but check your application requirements with Novus
- ③ Contact the Novus Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company.

Novus Sealing (Thailand) Co., Ltd. : 135/18 Amornphan 205 Tower 2 Bldg., 8th Flr., Ratchadaphisek Rd., Bangkok 10400 THAILAND

Tel +66-0-2689-5393 to 6 Fax +66-0-2689-5397 to 8 www.novusthailand.com E-Mail: enquiry@novusthailand.com