

## DATA / SPECIFICATION SHEET

# NOVUS 30

### DESCRIPTION

Novus 30 is a good quality compressed sheet material based on a blend of aramid and inorganic fibres with a nitrile rubber binder system.

### SERVICE


Novus 30 is a general purpose material suitable for use in wide range of applications, including hot and cold water, steam, oils, fuels, gases and a wide range of general chemicals.

### APPROVALS / COMPLIANCE

DIN-DVGW (Gas Industry) 93.01-e-845  
WRAS Potable Water  
Complies with BS Specification 7531 Grade Y  
TA-LUFT (in accordance with VDI Guideline 2440)

### AVAILABILITY

Thickness range = 0.4mm to 6.0mm  
Standard sheet sizes = 2.0m x 2.0m, 2.0m x 1.5m, 2.0m x 1.0m, 1.5m x 1.5m, 1.5m x 1.0m.  
Standard roll sizes = Up to a maximum size of 6.0m x 2.0m  
Available with fine mesh mild steel reinforcement: Novus 30 Metallic or gauze mild steel wire reinforcement: Novus 30 GWI.  
Can also be supplied with anti-stick coating and graphite coating.

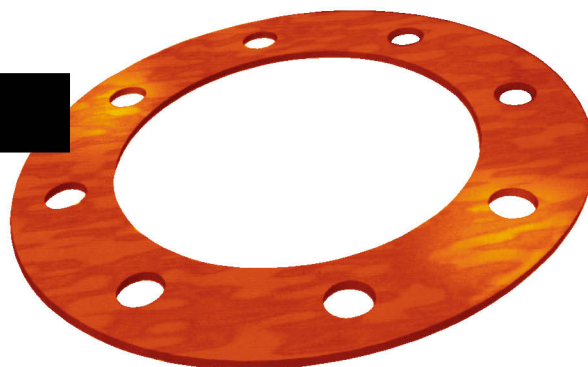


Colour - Orange

### TYPICAL PHYSICAL PROPERTIES

Thickness		1.5mm
Density		2.0g/cc
Tensile Strength	ASTM F152	12MPa
Compression	ASTM F36	9%
Recovery	ASTM F36	50%min
Residual Stress	BS7531 (300°C) DIN 52913	23MPa 29MPa
Gas Leakage	BS 7531	<1.0cc/min
ASTM Oil 1	Thickness Increase	2.0%
IRM 903 Oil	Thickness Increase	5.0%
ASTM Fuel B	Thickness Increase	4.0%

### Novus 30 (Supra)

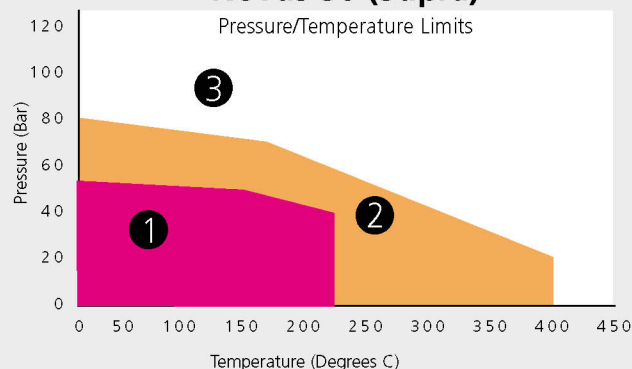

- 1 Suitable subject to chemical compatibility
- 2 Suitable in some cases but check your application requirements with Novus
- 3 Contact the Novus Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company.